

FORM PTO-1199 (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER Costa 9-9-6-8	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>10/069370</b>	
INTERNATIONAL APPLICATION NO. PCT/EP00/05707		INTERNATIONAL FILING DATE 06/20/2000		PRIORITY DATE CLAIMED 08/20/1999	
TITLE OF INVENTION <u>Location Area Identifier With Core Network Identify Field</u>					
APPLICANT(S) FOR DO/EO/US <u>Costa, M., Palat, S., Roberts, M., Sivagnanasusudaram, S.</u>					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input checked="" type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input checked="" type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1 821 - 1 825</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4)</p> <p>20. <input type="checkbox"/> Other items or information:</p>					
<p><b>"Express Mail" mailing label:</b></p> <p>number <b>FE821598838US</b></p> <p>Date of Deposit <b>2/15/02</b></p> <p>I hereby certify that this <b>10/069370</b> is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks</p> <p>Washington, D.C. 20590</p> <p>(Printed name of person mailing document of fee)</p> <p><b>E. Costa</b></p> <p>(Signature of person mailing paper of fee)</p>					

U.S. PATENT AND TRADEMARK OFFICE <b>12-069370</b>	INTERNATIONAL APPLICATION NO. <b>PCT/EP00/05707</b>	ATTORNEY'S DOCKET NUMBER <b>Costa 9-9-6-8</b>
--	--	--

21. <input checked="" type="checkbox"/> The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO. .... \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00 <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>	<b>CALCULATIONS PTO USE ONLY</b>  \$ 890.00
---	---

Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$
--	--	--	--	----

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	15 - 20 =		x \$18.00	\$
Independent claims	1 - 3 =		x \$84.00	\$
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$280.00	\$
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 890.00

<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.	\$
<b>SUBTOTAL =</b>	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).	\$
<b>TOTAL NATIONAL FEE =</b>	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +	\$ 40.00
<b>TOTAL FEES ENCLOSED =</b>	
	\$ 930.00
	Amount to be refunded: \$
	charged: \$

☐ A check in the amount of \$ \_\_\_\_\_ to cover the above fees is enclosed.

☒ Please charge my Deposit Account No. 12-2325 in the amount of \$ 930.00 to cover the above fees.  
 A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
 overpayment to Deposit Account No. 12-2325. A duplicate copy of this sheet is enclosed.


☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. Credit card  
 information should not be included on this form. Provide credit card information and authorization on PTO-2038

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Docket Administrator  
 Lucent Technologies Inc.  
 Room 3J-219  
 101 Crawfords Corner Rd.  
 Holmdel, NJ 07733-3030

  
 SIGNATURE  
Gregory J. Murgia  
 NAME  
41209  
 REGISTRATION NUMBER

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

**Patent Application**

Inventors           Mauro Costa  
                      Sudeep Kumar Palat  
                      Michael Roberts  
                      Sutha Sivagnanasundaram

Case                9-9-6-8

Serial No.

Examiner

Title                Location Area Identifier With Core Network Identity Field

**ASSISTANT COMMISSIONER OF PATENTS**

**WASHINGTON, D.C. 20231**

SIR:

PRELIMINARY AMENDMENT

-  
-

**IN THE CLAIMS**

Amend claims 3-9 and add claims 10-15.

1. (no change) A packet switched network architecture having a first location area associated with a first core network and a second location area associated with a second core network, wherein at least a portion of the first and second location areas overlap thereby forming a common location area, the common location area being associated with a location area identifier common to both the first and second core networks, the location area identifier additionally including a core network identifier field having a value to distinguish between the first and second core networks.
2. (no change) The packet switched network of claim 1 wherein the radio access network associated with the first location area uses the value in the location area identifier to direct packet transmission from mobile terminals in the common location area to one of the first and second core networks.


206120-02369001

3. (once amended) The packet switched network of claim 2 in which the first and second core networks have the same functionality.
4. (once amended) The packet switched network of claim 2 in which the first and second core networks have different functionality.
5. (once amended) The packet switched network of claim 2 in which the common location area is connected to the first and second core networks by a common radio access network.
6. (once amended) The packet switched network of claim 2 in which the common location area is connected to the first and second core networks by first and second radio access networks.
7. (once amended) The packet switched network of claim 6, in which the first and second radio access networks have different functionality and correspond to the respective functionality of the first and second core networks.
8. (once amended) The packet switched network of claim 2 wherein the value in the location area identifier is a single bit.
9. (once amended) The packet switched network of claim 2 wherein the value in the location area identifier is a range of values.
10. (newly added) The packet switched network of claim 1 in which the first and second core networks have the same functionality.
11. (newly added) The packet switched network of claim 1 in which the first and second core networks have different functionality.
12. (newly added) The packet switched network of claim 1 in which the common location area is connected to the first and second core networks by a common radio access network.
13. (newly added) The packet switched network of claim 1 in which the common location area is connected to the first and second core networks by first and second radio access networks.
14. (newly added) The packet switched network of claim 1 wherein the value in the location area identifier is a single bit.
15. (newly added) The packet switched network of claim 1 wherein the value in the location area identifier is a range of values.

#### REMARKS

Claims 1-15 are in this application. Claims 3-9 were amended. Claims 10-15 were added. Support for the amendments and the new claims can be found in originally filed claims 3-9.  
No additional fee is due.

Respectfully,  
Mauro Costa  
Sudeep Kumar Palat  
Michael Roberts  
Sutha Sivagnanasundaram

By   
Gregory J. Margia  
Reg No. 41209

Date: 2/18/02

MARKED-UP VERSION OF THE CLAIMS

1. (no change) A packet switched network architecture having a first location area associated with a first core network and a second location area associated with a second core network, wherein at least a portion of the first and second location areas overlap thereby forming a common location area, the common location area being associated with a location area identifier common to both the first and second core networks, the location area identifier additionally including a core network identifier field having a value to distinguish between the first and second core networks.
2. (no change) The packet switched network of claim 1 wherein the radio access network associated with the first location area uses the value in the location area identifier to direct packet transmission from mobile terminals in the common location area to one of the first and second core networks.
3. (once amended) The packet switched network of [claim 1 or] claim 2 in which the first and second core networks have the same functionality.
4. (once amended) The packet switched network of [claim 1 or] claim 2 in which the first and second core networks have different functionality.
5. (once amended) The packet switched network of [any preceding] claim 2 in which the common location area is connected to the first and second core networks by a common radio access network.
6. (once amended) The packet switched network of [any preceding] claim 2 in which the common location area is connected to the first and second core networks by first and second radio access networks.
7. (once amended) The packet switched network of claim 6 [when dependent on claim 4], in which the first and second radio access networks have different functionality and correspond to the respective functionality of the first and second core networks.
8. (once amended) The packet switched network of [any one of claims 1 to 7] claim 2 wherein the value in the location area identifier is a single bit.
9. (once amended) The packet switched network of [any one of claims 1 to 7] claim 2 wherein the value in the location area identifier is a range of values.
10. (newly added) The packet switched network of claim 1 in which the first and second core networks have the same functionality.
11. (newly added) The packet switched network of claim 1 in which the first and second core networks have different functionality.
12. (newly added) The packet switched network of claim 1 in which the common location area is connected to the first and second core networks by a common radio access network.
13. (newly added) The packet switched network of claim 1 in which the common location area is connected to the first and second core networks by first and second radio access networks.
14. (newly added) The packet switched network of claim 1 wherein the value in the location area identifier is a single bit.
15. (newly added) The packet switched network of claim 1 wherein the value in the location area identifier is a range of values.

10869370.021902

**LOCATION AREA IDENTIFIER WITH CORE NETWORK****IDENTITY FIELD****Field of the Invention**

The present invention relates to an improved network architecture for an arrangement in which mobile terminals may have at least two functional modes of operation in which the functional modes are provided by at least two core networks having different functionality. The invention is particularly but not exclusively related to the introduction of 3G services into a 2G network architecture.

**10 Background to the Invention**

GSM (Global System for Mobile Communications) radio coverage, which may also be referred to as second generation (2G) radio coverage, is quite extensive today. During the introduction of UMTS (Universal System for Mobile Telecommunications), which may also be referred to as third generation (3G) radio coverage, UMTS radio coverage is expected to be limited to urban areas. Thus UMTS radio coverage will cover only parts of the more extensive GSM radio coverage areas. Even within UMTS coverage areas, the UMTS radio coverage cannot be expected to be contiguous. For example, given that the frequency used for UMTS is higher than that for GSM, the in-building penetration will not be as good as GSM. This will result in small pockets (such as inside buildings) without UMTS coverage within the overall UMTS coverage area. Thus, only GSM radio coverage will be available in these pockets.

A dual mode GSM and UMTS mobile terminal (a mobile terminal is referred to as user equipment (UE) in UMTS) can communicate using either one of the two radio access systems. If a dual mode mobile terminal communicating via the UMTS radio link goes out of UMTS coverage, to an area with only GSM coverage, it can expect to continue the communication via the GSM radio link, but with a consequential degradation of service. Similarly a dual mode mobile terminal in an area with only GSM radio coverage which moves into an area with UMTS coverage can expect to switch to the UMTS radio link to improve service.

Thus as a dual mode mobile terminal moves around within radio access areas, changes in the type of radio access can be expected as the available radio access systems change. As the mobile terminal moves between radio access areas routing area updates occur to notify the necessary support network of the new position of the mobile in the routing area associated with the particular radio access type. Changing between two radio access systems involves additional signalling and can also lead to outages during the transition between the two systems. The impact of the additional signalling and outages depends on the network architecture and the protocols chosen.

In addition, if a mobile terminal operating in the 3G mode of operation moves out of 3G coverage, then there is a consequential degradation in service when communication with the 2G core network is established. It is an object of the present invention to provide a technique suitable for use in a network architecture in which more than one type of core network is provided.

It is known from International Patent Publication WO98/37721 to provide a packet switched network architecture having a first location area associated with a first core network and a second location area associated with a second core network, wherein at least a portion of the first and second location areas overlap thereby forming a common location area, the common location area being connected to the first and second core networks by a common radio access network.

## 20 Summary of the Invention

The present invention is characterised in that the common location area being associated with a location area identifier value common to both the first and second core networks, and the location area identifier additionally including a core network identifier field having a value to distinguish between the first and second core networks.

The radio access network associated with the first location area may use the core network identifier field value in the location area identifier to direct packet transmission from mobile terminals in the common location area to one of the first and second core networks.

30

The first and second core networks may have the same functionality.

The first and second core networks may have different functionality.

The common location area may be connected to the first and second core networks by a common radio access network.

5

The core network identifier field value in the location area identifier may be a single bit.  
The core network identifier field value in the location area identifier may be a range of values.

10

The invention will now be described by way of example with reference to the accompanying drawings, in which:

**Brief Description of the Drawings**

Figure 1 illustrates the patchy nature of UMTS radio coverage in a GSM coverage area;

Figure 2 illustrates a network architecture for the proposed introduction of 3G services in an existing 2G environment;

Figure 3 illustrates a modified network architecture for the proposed introduction of 3G services in an existing 2G environment;

Figures 4(a) and 4(b) illustrate location area identifiers for distinguishing between core networks servicing common location areas; and

Figure 5 illustrates a network architecture in which parallel core network resources of the same functionality are used to support a single location area.

**Description of Preferred Embodiment**

The present invention will be described hereinafter by way of reference to the particular non-limiting example of the deployment of a 3<sup>rd</sup> Generation (3G) mobile system alongside a 2<sup>nd</sup> Generation (2G) mobile system. In the particular example the 2G system is a GSM/GPRS system, and the 3G



system is a UMTS system. The invention, however, is not limited to such a specific environment.

Figure 1 illustrates the coverage expected to be provided by UMTS in a GSM radio access area. The shaded areas represent areas with only GSM coverage. The non-shaded areas represent areas with both GSM and UMTS coverage. Thus the whole of the area 2 is provided with GSM coverage. The smaller area 4 within the area 2 is intended to be provided with UMTS coverage in addition to GSM coverage. However pockets, designated by reference numeral 6, exist within the UMTS coverage area 4, such that only GSM coverage is provided in the pockets 6.

The current proposed network architecture for supporting the radio coverage as illustrated in Figure 1 is as shown in Figure 2. The GSM radio access area and the UMTS radio access area are considered as independent systems having distinct location areas, each served by a different serving GPRS support node (SGSN) and a different mobile switching centre (MSC). The SGSNs provide the support node for the respective radio systems to support packet switched communications.

Referring to Figure 2, the GSM radio access area is defined by a first location area 200 designated LA1, and the UMTS radio access area is defined by a second location area 202 designated LA2. The second location area in fact coincides with the first location area, as shown in Figure 1.

The first location area LA1 is associated with a GSM/GPRS BSS 204, providing a radio access network for the GSM/GPRS radio access system. The BSS 204 is connected to a 2G core network 214 via an A interface 206 and a Gb interface 208. The second location area LA2 is associated with a UTRAN 210, providing a radio access network for the UMTS radio access system. The UTRAN 210 is connected to a 3G core network 212 via an Iu interface 216 and an interface 218.

The 2G core network includes a 2G MSC 220, an integral 2G visitor location register (VLR) 222, and a 2G SGSN 224. The 2G MSC is

connected to the BSS 204 via the A interface 206. The 2G SGSN is connected to the BSS 204 via the Gb interface 208. The MSC 220 is connected to its integral 2G VLR via a Map B interface 234.

5 The 3G core network includes a 3G MSC 226, an integral 3G VLR 228, and a 3G SGSN 230. The 3G MSC 226 is connected to the UTRAN 210 via the Iu interface 216. The 3G SGSN 230 is connected to the UTRAN 210 via the interface 218. The 3G MSC 226 is connected to its integral 3G VLR 228 via a Map B interface 232.

10 Each of the 2G and 3G core networks 214 and 212 will of course contain other functional blocks. However, these are not shown in Figure 2 as they are not relevant to an implementation of the present invention and will be familiar to one skilled in the art.

15 As is clear from Figure 1, the location area LA2 is in fact part of the same geographical area as the location area LA1 – if a mobile terminal is in location area LA2 it is also in location area LA1. However, from a network architecture viewpoint the location area 2 is treated as a distinct area from that of the location area 1.

20 As a mobile moves around within the location area LA2, it will move in and out of 3G coverage, as indicated by the pockets in Figure 1. In the network architecture of Figure 2, whenever a mobile terminal moves in and out of 3G coverage in the area LA2 a routing area update must take place, and when 3G coverage is lost a dual mode mobile terminal must continue in 2G mode, with a consequential degradation in service.

25 One disadvantage with this is that the 2G MSC is implemented using 64 kbit/s technology, whereas the 3G MSC supports much higher bit rates. When a mobile terminal having 3G functionality has to switch from the 3G radio access network to the 2G radio access network then there is a consequential degradation in service. It is of course impractical to upgrade the 2G core network infrastructure to replace existing MSCs with higher specification versions.

30

10069370.021902

Therefore it is necessary to provide the new MSC and integral VLR in the 3G core network to support the 3G functionality of mobile terminals.

In summary, the network architecture of Figure 2 does not allow the radio access network to be used to its full capacity to support mobile terminals having 3G functionality.

A proposed new network architecture to provide an improved utilisation of the advanced ability of 3G mobile terminals using the existing 2G infrastructure is illustrated in Figure 3. In Figure 3 like reference numerals are used to identify elements corresponding to those shown in Figure 2.

In the network architecture of Figure 3, the two distinct location areas of Figure 2 are 'overlaid' to form a common location area. Referring to Figure 3, the common location area is labelled as LA3 and designated by reference numeral 300. The location area LA2 corresponding to the 3G coverage area is also still distinctly defined. The common location area LA3 is comprised of 2G cells, but the network architecture allows mobile terminals in those cells having 3G functionality to connect to a core network having 3G functionality, as will be discussed further hereinbelow.

The location area LA 2 is comprised of 3G cells as in Figure 2, and enables the mobile terminals in the location area LA2 having 3G functionality to connect to the 3G core network 212 via the UTRAN 210 radio access network as before.

The 2G BSS 204 of Figure 2 is modified for the implementation of Figure 3, and thus the 2G BSS in Figure 3 is designated by reference numeral 302. The 2G BSS 302 is provided with an additional A interface labelled A' and designated by reference numeral 306, which connects the 2G BSS 302 to the 3G MSC in the 3G core network. The 2G BSS 302 is also provided with an additional Gb interface labelled Gb' and designated by reference numeral 304, which connects the 2G BSS 302 to the 3G SGSN in the 3G core network.

In accordance with the new network architecture of Figure 3, the BSS 302 directs packet transmissions from mobiles in the combined location area LA3 300 to either the 2G core network or the 3G core network. Similarly, in the other direction the BSS 302 directs packet transmissions from the 2G or 3G core network to mobile terminals in the combined location area LA3.

In accordance with the implementation of the network architecture shown in Figure 3, the radio access network comprising the BSS 302 switches packet transmissions from the combined location area to one of either the 2G core network or the 3G core network.

The radio access network comprising the BSS 302 may switch the packet transmissions from mobile terminals to a respective one of the two core networks in dependence on a number of factors. For example the packet transmissions may be switched in dependence on the type of mobile terminal from which the packet originated, the capabilities of the mobile from which the packet originated, or the 2G cell in which the mobile terminal is connected in the location area LA3.

Although the radio access network having the switching capability is the preferred implementation of the improved network architecture for implementing the combined location area, other implementations may be possible. For example, the standard BSS 204 of Figure 2 may be utilised, with the 2G core network being modified to include 3G functionality, and some control mechanisms to select between the 2G and 3G functionality being added within the 2G core network. This implementation is less preferable than the implementation shown in Figure 3 since it requires modifications to the 2G core network.

The technical feature which enables the 'overlying' of the location areas LA1 and LA2 to be implemented is the provision of a single radio access network (the BSS 302) which connects the user terminals in the two location areas to both the 2G and 3G functionality in the core network.

In addition, the network architecture of Figure 3 may be extended to network architectures in which the location areas only partially overlap. That is, in the 2G/3G scenario described hereinabove the 3G location area fits completely into the 2G location area, and the 2G location area is bigger than the 3G location area. That is, the 3G location area fully coincides with the 2G location area. However, the principle of 'overlying' location areas may extend to location areas which do not exhibit this characteristic.

In addition, the principle of 'overlying' location areas may extend to more than two location areas, and may extend to more than two core networks. For example, in the future the radio access network provided by the BSS 302 may have the added capability of switching to a 4<sup>th</sup> Generation (4G) core network.

In addition, the provision of this network architecture is not limited to the use of a BSS as the radio access network. The technique readily applies to other radio access networks such as the UTRAN 210. The UTRAN 210 may be provided with a switching functionality in addition to the BSS 302, for example to a 4G core network in addition to the 3G core network. The UTRAN may even provide a switching functionality to switch between the 3G core network 212 and the 2G core network 214.

Although in the network architecture of Figure 3 the BSS 302 switches between the 2G core network 214 and the 3G core network 212 provided for location area LA2, a separate 3G core network may be provided for this purpose.

The principle of using the radio access network to switch packet transmissions from the location area LA3 to one of two different core networks may also be more generally applicable. In the introduction of 3G, mobile terminals are likely to have dual functionality, i.e. the ability to operate as a 2G terminal instead of a 3G terminal when 3G radio service is not available. By the use of a switchable radio access network, mobile

terminals having a 3G functionality which are in 2G location areas may be switched to a 3G core network. Thus the mobile terminals having 3G functionality may utilise some 3G functionality even though they are connected in a 2G location area.

- 5 Thus the principle of a radio access network which can switch packet transmissions to core networks of differing functionality does not depend on the overlaying of multiple location areas, and applies more generally in single location areas to mobile terminals having more than one mode of operation.
- 10 Referring again to Figure 3, it can be seen that the location area LA3 300 encompassing the location areas LA1 and LA2 can be considered as a single geographical area by the overlaying of the two location areas. Thus, a single location area identifier may be used to identify the common location area LA3. However, if a common location area identifier were
- 15 used then the mobile terminals in the common location area 300 would not be able to distinguish between the one of the core networks in which communication is established.

In accordance with a further modification, the location area identifier for the common location area 300 is provided with a core network identifier

20 field to distinguish between the 2G and 3G core networks.

Referring to Figures 4(a) and 4(b), there is illustrated an implementation of the location area identifiers transmitted by the 2G and 3G core networks respectively. Preferably the location area identifier is a 16 bit sequence. In accordance with this improvement, the core network

25 identifier field to distinguish between the 2G and 3G core network is the first bit of the 16 bit location area identifier. The first bit of the sequence is set to either 0 or 1 to indicate 2G or 3G. That is, the core network in which the location area identifier originates sets this bit. The remaining 15 bits of the location identifier, containing the location area identifier

10669370.021902

(LAI) value will be identical. Thus the core network identifier filed of the location area identifier is a pointer to a core network.

Referring to Figure 4(a), the location area identifier 402 generated by the 2G core network has a first bit 404 which is set to 0, and the location area identity LAI 406. Referring to Figure 4(b), the location area identifier 403 generated by the 3G core network comprises a first bit which is set to 1, and the location area identifier value LAI 410.

Mobile terminals in the location LA3 may have 2G or 3G functionality. The mobile terminals having 3G functionality can disregard the bit 0 in the first bit position. As these mobiles preferably have dual mode functionality, then all broadcast messages from the radio access network having the appropriate location area identifier are received by these terminals as they receive all broadcast messages whether from the 2G or 3G core network. The mobiles having only 2G functionality read the first bit of the location area identifier and only read the broadcast messages having the bit set to indicate that they originated in the 2G core network.

Of course, if any 3G terminals in the common location area do not have 2G functionality then they will need to read the first bit of the location area identifier to ensure that the bit is set to indicate that the broadcast message originated in the 3G core network.

Although in this preferable example the location area identifier is a 16 bit sequence and the core network identifier field is 1 bit, this may vary according to the implementation. The location area identifier may be any number of bits, and the core network identifier field any number of bits. In an alternative, the core network identifier may be determined by the location area identifier value being within a certain range.

Of course, in the event that more than two core networks are accessible from the location area, an appropriate range of values must be provided by the core network identifier.

The use of the core network identifier is also advantageous in the arrangement described hereinabove where a single location area is accessible by several core networks of different functionality.

5 A further useful implementation of the radio access network having a switching functionality, as described hereinabove with reference to the preferable implementation of Figure 3, is described hereinbelow with reference to Figure 5. In Figure 5 like reference numerals are used to identify elements corresponding to elements shown in Figure 2.

10 Referring to Figure 5, the 2G network architecture of Figure 2 is modified to introduce a second 2G core network 514. The radio access network represented by BSS 302 in Figure 2 is replaced in the network architecture of Figure 5 by a radio access network comprising a BSS 500 having a switching functionality similar to that of the BSS 302 as will be described further hereinafter.

15 The second 2G core network 514 includes a 2G MSC 520, an integral 2G VLR 522, and a 2G SGSN 524. The 2G MSC 520 is connected to the BSS 500 via a second A interface 506 labelled A'. The 2G SGSN 524 is connected to the BSS 500 via a second Gb interface 508 labelled Gb'. The MSC 520 is connected to its integral 2G VLR 522 via a Map B interface  
20 534.

In this implementation, the switching capability of the BSS 500 is utilised to spread the load amongst the two 2G core networks 214 and 514. This may be particularly advantageous where the BSS 500 has a greater Erlang capacity than the single core network. By duplicating the core  
25 network the BSS 500 can work nearer its capacity.

The technique described above for including a core network identifier field in the location area identifier for distinguishing between 2G and 3G functionality in the network architecture of Figure 3 may be used in the network architecture of Figure 5 to distinguish between the respective 2G  
30 core networks. Thus a mobile terminal in the location area LA1 can use



12

the first bit of the location area identifier to distinguish between the two core networks 214 and 514, and read the broadcast messages associated with the core network with which it is registered.

More generically, when a mobile terminal registers its presence in the location area LA1 by a random access request to the core network via the BSS 500, the BSS 500 will forward the request to one of the two core networks 214 and 514.

In acknowledging the random access request the appropriate core network will provide the mobile terminal with an identifier to be used in all future packet transmissions. This identifier is then included in all packet transmissions by the mobile terminal, and used by the BSS 500 to direct the packet transmission to the appropriate core network.

The network architecture of Figure 5 may be combined with the network architecture of Figure 3, such that each of the 2G and 3G core networks may be provided with parallel duplicate networks for spreading the load.

## CLAIMS

- 10069370.021902
1. A packet switched network architecture having a first location area associated with a first core network and a second location area associated with a second core network, wherein at least a portion of the first and second location areas overlap  
5 thereby forming a common location area, the common location area being connected to the first and second core networks by a common radio access network, characterised in that the common location area being associated with a location area identifier value common to both the first and second core networks, and the location area identifier additionally including a core network identifier field having a value to distinguish  
10 between the first and second core networks.
2. The packet switched network of claim 1 wherein the radio access network associated with the first location area uses the core network identifier field value in the location area identifier to direct packet transmission from mobile terminals in the common location area to one of the first and second core networks.
- 15 3. The packet switched network of claim 1 or claim 2 in which the first and second core networks have the same functionality.
4. The packet switched network of claim 1 or claim 2 in which the first and second core networks have different functionality.
5. The packet switched network of any one of claims 1 to 4 wherein the  
20 core network identifier field value in the location area identifier is a single bit.
6. The packet switched network of any one of claims 1 to 5 wherein the core network identifier field value in the location area identifier is one of a range of values.

1/4

FIG. 1



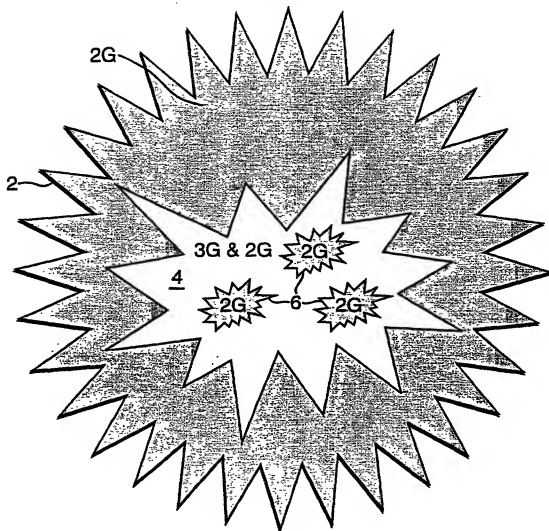


FIG. 4

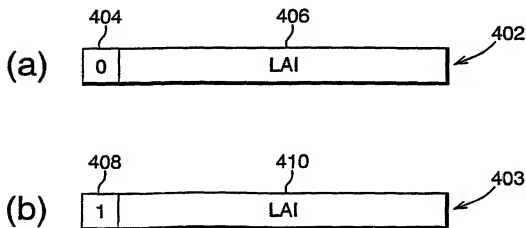

2/4

FIG. 2

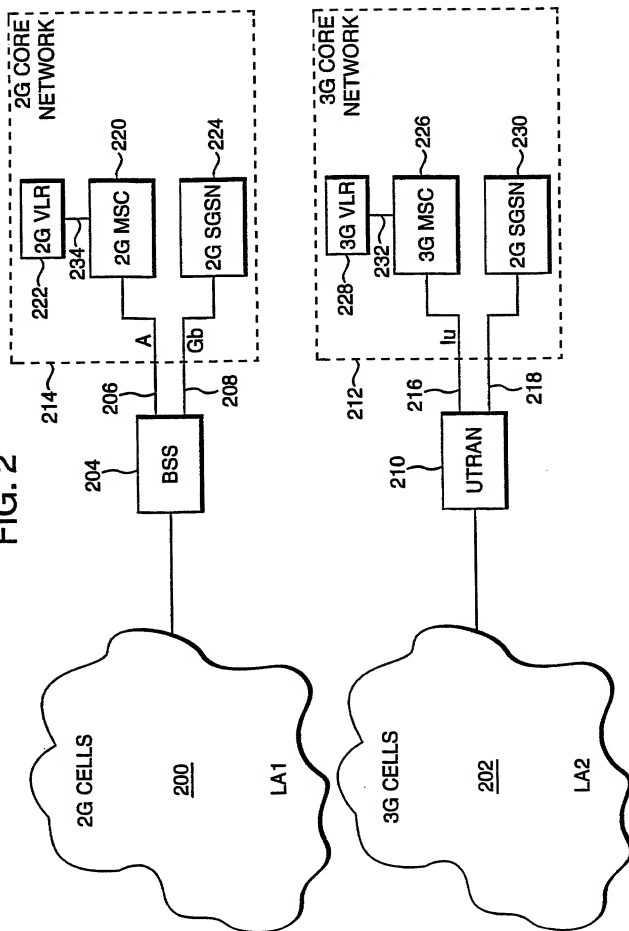

3/4

206120\*04669001


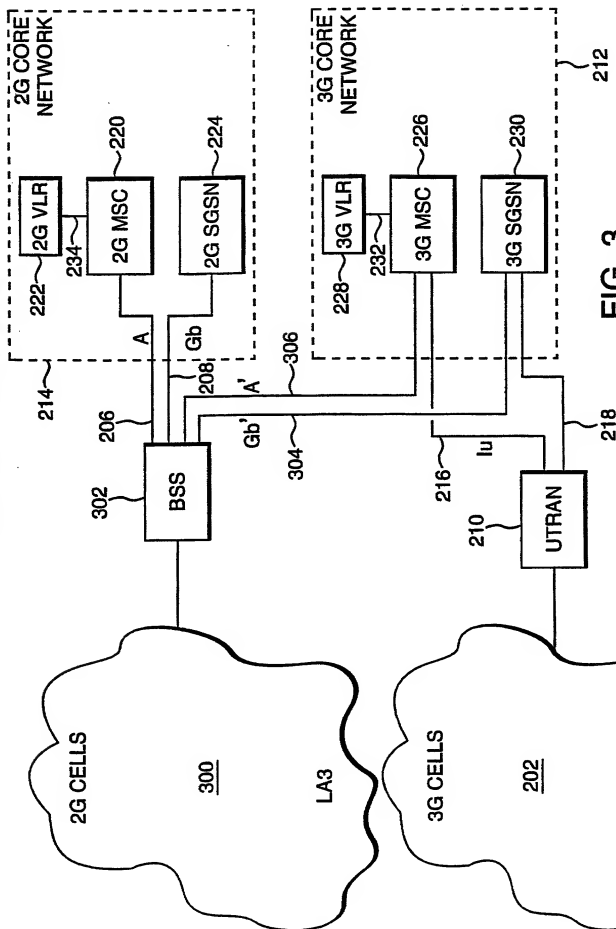


FIG. 3

4/4

FIG. 5

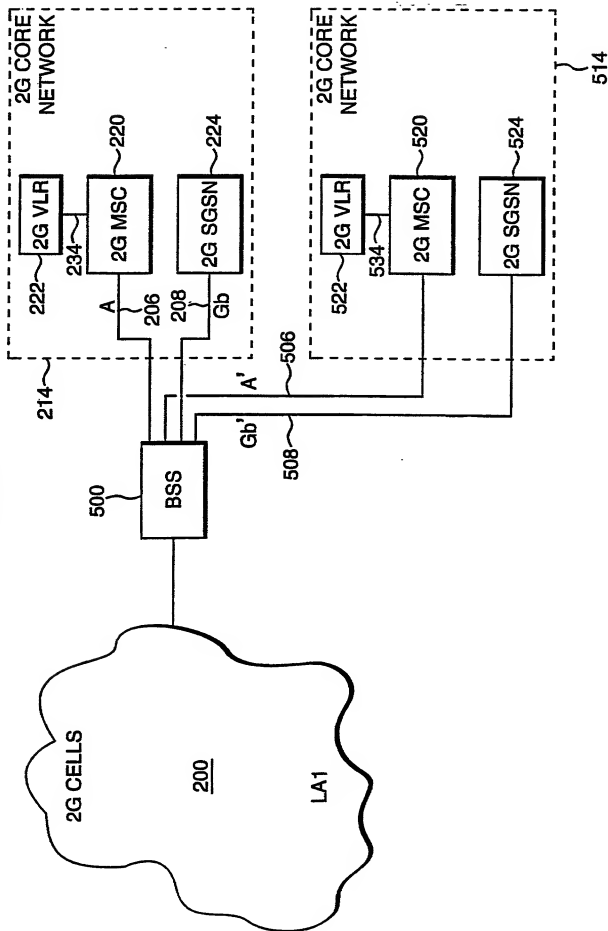

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Location Area Identifier With Core Network identity Field** the specification of which

☒ is attached hereto

OR

☐ was filed on \_\_\_\_\_ and granted Application Serial Number \_\_\_\_\_.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

**9919852.5      August 20, 1999**

I hereby claim the benefit under Title 35, United States Code, 120 of any foreign application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**International  
Application No.  
PCT/EP00/05707**

**Filing Date  
20<sup>th</sup> June 2000**

**Status  
Pending**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States

Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Thomas J. Bean (Reg. No. 44528)  
 Lester H. Birnbaum (Reg. No. 25830)  
 Richard J. Botos (Reg. No. 32016)  
 Jeffery J. Brosemer (Reg. No. 36096)  
 Kenneth M. Brown (Reg. No. 37590)  
 Donald P. Dinella (Reg. No. 39961)  
 Martin I. Finston (Reg. No. 31613)  
 William S. Francos (Reg. No. 38456)  
 Barry H. Freedman (Reg. No. 26166)  
 Julio A. Garceran (Reg. No. 37138)  
 Jimmy Goo (Reg. No. 36528)  
 Anthony Grillo (Reg. No. 36535)  
 Stephen M. Gurey (Reg. No. 27336)  
 John M. Harman (Reg. No. 38173)  
 Matthew J. Hodulik (Reg. No. 36164)  
 Michael B. Johannesen (Reg. No. 35557)  
 Mark A. Kurisko (Reg. No. 38944)  
 Irena Lager (Reg. No. 39260)  
 John B. MacIntyre (Reg. No. 41170)  
 Christopher N. Malvone (Reg. No. 34866)  
 John F. McCabe (Reg. No. 42854)  
 Scott W. McLellan (Reg. No. 30776)  
 Martin G. Meder (Reg. No. 34674)  
 John C. Moran (Reg. No. 30782)  
 Michael A. Morra (Reg. No. 28975)  
 Gregory J. Murgia (Reg. No. 41209)  
 Claude R. Narcisse (Reg. No. 38979)  
 Joseph J. Opalach (Reg. No. 36229)  
 Neil R. Ormos (Reg. No. 35309)  
 Eugen E. Pacher (Reg. No. 29964)  
 Jack R. Penrod (Reg. No. 31854)  
 Gregory C. Ranieri (Reg. No. 29695)  
 Scott J. Rittman (Reg. No. 39010)  
 Ferdinand M. Romano (Reg. No. 32752)  
 Eugene J. Rosenthal (Reg. No. 36658)  
 Bruce S. Schneider (Reg. No. 27949)  
 Ronald D. Slusky (Reg. No. 26585)  
 David L. Smith (Reg. No. 30592)  
 Ozer M.N. Teitelbaum (Reg. No. 36698)  
 John P. Veschi (Reg. No. 39058)  
 David Volejnick (Reg. No. 29355)  
 Charles L. Warren (Reg. No. 27407)  
 Jeffrey M. Weinick (Reg. No. 36304)  
 Eli Weiss (Reg. No. 17765)

44


10069370-021502



I hereby authorize these attorneys to insert in the above blanks the filing date and application serial no. when known.

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to David Williams by dialing 011-44-208-504-2824.

Full name of 1st joint inventor: Mauro Costa

Inventor's signature 

Date 18/01/2001

Residence: Pavia, Italy

Citizenship: Italy

Post Office Address: via Dabusti 55  
Casteggio 27045  
Pavia  
Italy

ITX

Full name of 2<sup>nd</sup> inventor: Sudeep Kumar Palat

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence: Grange Park, Wiltshire, Great Britain

Citizenship: India

Post Office Address: 26 Heytsbury Gardens  
Grange Park  
SN5 6EE  
Great Britain

Full name of 3<sup>rd</sup> inventor: Michael Roberts

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_

Residence: Prittlewell, Southend-on-Sea, Essex, Great Britain

Citizenship: Great Britain

Post Office Address: 127 East Street  
Prittlewell, Southend-on-Sea  
SS2 5EB  
Great Britain



Full name of 4<sup>th</sup> inventor: Sutha Sivagnanasundaram

200120.026500

I hereby authorize these attorneys to insert in the above blanks the filing date and application serial no. when known.

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to David Williams by dialing 011-44-208-504-2824.

Full name of 1st joint inventor: Mauro Costa

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: Pavia, Italy

Citizenship: Italy

Post Office Address: via Dabusti 55  
Casteggio 27045  
Pavia  
Italy

Full name of 2<sup>nd</sup> inventor: Sudeep Kumar Palat

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: Grange Park, Wiltshire, Great Britain

Citizenship: India

Post Office Address: 26 Heytsbury Gardens  
Grange Park  
SN5 6EE  
Great Britain

3-00

Full name of 3<sup>rd</sup> inventor: Michael Roberts

Inventor's signature  Date 28/11/02

Residence: Prittlewell, Southend-on-Sea, Essex, Great Britain

Citizenship: Great Britain

Post Office Address: 127 East Street  
Prittlewell, Southend-on-Sea  
SS2 5EB  
Great Britain

G.B.N

Full name of 4<sup>th</sup> inventor: Sutha Sivagnanasundaram

10669370.021902

I hereby authorize these attorneys to insert in the above blanks the filing date and application serial no. when known.

Please address all correspondence to the Docket Administrator (Rm. 3C-512), Lucent Technologies Inc., 600 Mountain Avenue, P. O. Box 636, Murray Hill, New Jersey 07974-0636. Telephone calls should be made to David Williams by dialing 011-44-208-504-2824.

Full name of 1st joint inventor: Mauro Costa

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: Pavia, Italy

Citizenship: Italy

Post Office Address: via Dabusti 55  
Casteggio 27045  
Pavia  
Italy

2-00

Full name of 2<sup>nd</sup> inventor: Sudeep Kumar Palat

Inventor's signature Sudeep Kumar Date 03/01/2001

Residence: Grange Park, Wiltshire, Great Britain GBN

Citizenship: India

Post Office Address: 26 Heytsbury Gardens  
Grange Park  
SN5 6EE  
Great Britain

Full name of 3<sup>rd</sup> inventor: Michael Roberts

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence: Prittlewell, Southend-on-Sea, Essex, Great Britain

Citizenship: Great Britain

Post Office Address: 127 East Street  
Prittlewell, Southend-on-Sea  
SS2 5EB  
Great Britain

4-00

Full name of 4<sup>th</sup> inventor: Sutha Sivagnanasundaram

10069370.021902

M. Costa 9-9-6-8

Inventor's signature

4  


Date

10/6/01  
C.B.N.

Residence: Tooting, London, Great Britain

Citizenship: Sri Lanka

Post Office Address: 93 Lines Road  
Tooting  
SW17 4EJ  
Great Britain

206120.0/369001